


Starling Q62 MAX

Elevating Security
with Unmatched Deterrence



PRODUCT VIDEO

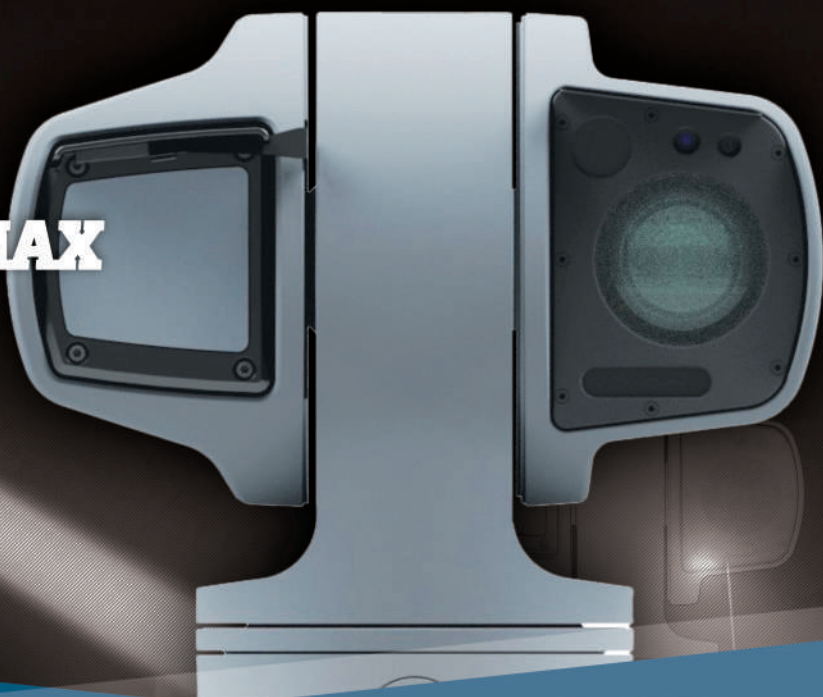

Military



Law Enforcement



Infrastructure



Airports



Ports



Private Security

PTZ WITH LONG-RANGE SEARCHLIGHT


The Starling Q62 MAX is a reliable and robust PTZ network camera, designed for high precision pan, tilt, and zoom performance, ideal for wide and long-distance surveillance, day and night. What sets it apart is the Wiseled upgrade, featuring a multispectral cluster of illuminators: infrared floodlight, infrared laser, visible searchlight, and green laser dazzler. This transforms your security system from passive to highly active deterrence. Inspired by our defense-grade products, it's a powerful tool against intruders.

MILITARY GRADE MULTISPECTRAL ILLUMINATION

With our multiple illuminators, your Starling Q62 goes from passive and covert, to active and deterrent in an instant. A floodlight and laser in the infrared spectrum allows for enhanced night time images while you remain undetected. Activate our intense searchlight in wide or narrow setting, and it turns night into day, giving color and clarity to your crucial moments of intrusion recording. Not enough? Our green laser dazzler sends a deterrent message that knows no language barriers.

The Starling Q62 has seen applications on buildings, masts, vehicles, boundary posts and as rapid deployment kits.

Starling Q62^{MAX}

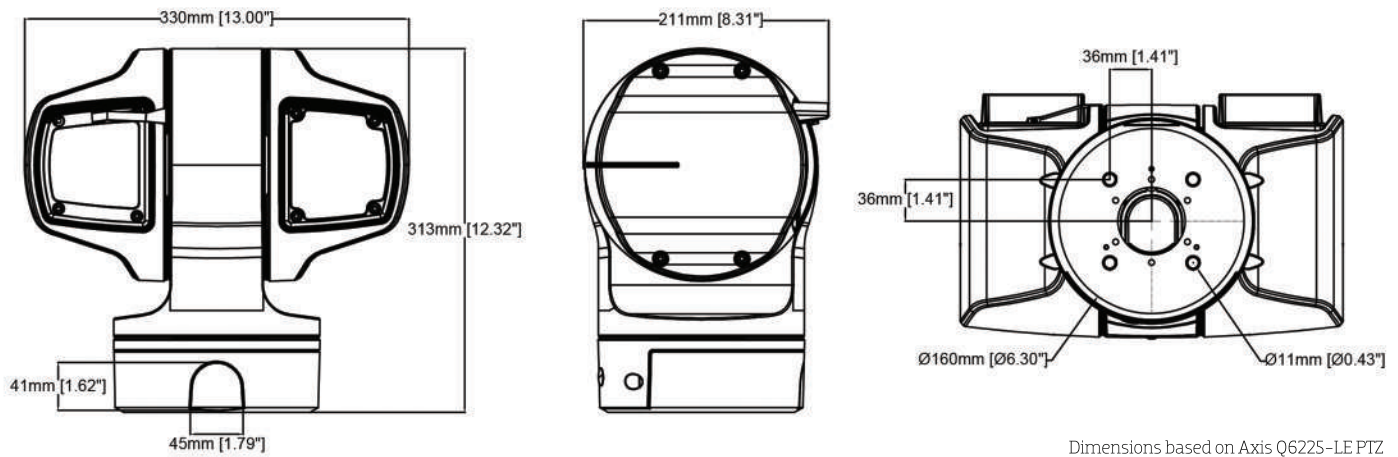

General

Ruggedized PTZ with Day/Night network camera with 1080p and 31x zoom and a multispectral cluster of illumination: infrared floodlight, infrared laser, visible searchlight, and green laser dazzler.

Specifications

illumination	Visible Searchlight	IR Floodlight	IR Spotlight	Green Laser Dazzler
Technology	Class 1-2 LEP (Laser) 400-700nm	LED 850nm	Class 3B Laser 860nm	Class 3B Laser 532nm
Divergence	1° - 19° focusable spot to flood	-	54 mrad = 27m radius @ 500m	10 mrad / 0.6° = 5m radius @ 500m
Intensity and Output	4.000.000 candelas		50-400mW options	50 mW - 250mW options
Range	0.25 Lux @ 4000m / 4 lux @ 1000m	≤ 400m	> 500m	> 500m
Beam Intensity	0-100% / Constant / Strobe	On/Off	High / Low / Eye safe	High / Low / Strobe / Eye safe
Color temperature	5900 Kelvin	-	-	-
NOHD	Eye safe	Eye safe	< 4m	20m (@ max output 250mW)

Axis Q6225-LE PTZ Camera Specifications

Camera		System: system ready Time: use schedule
Image sensor	1/2" progressive scan CMOS	
Lens	Focal length: 6.91 – 214.64 mm, F1.36 – F4.6 Horizontal field of view: 63.8° – 2.2° Vertical field of view: 37° – 1.3° Autofocus, P-iris	Event actions Record video: SD card and network share MQTT publish Upload of images or video clips: FTP, SFTP, HTTP, HTTPS, network share and email Pre- and post-alarm video or image buffering for recording or upload Notification: email, HTTP, HTTPS, and TCP PTZ: PTZ preset, start/stop guard tour, autotracking Overlay text, day/night mode
Day and night	Automatically removable infrared-cut filter	Data streaming Event data
Minimum illumination	Color: 0.05 lux at 30 IRE F1.36 B/W: 0.001 lux at 30 IRE F1.36, 0 lux with IR illumination on Color: 0.08 lux at 50 IRE F1.36 B/W: 0.008 lux at 50 IRE F1.36, 0 lux with IR illumination on	Built-in installation aids Pixel counter Automatic orientation
Shutter speed	1/111000 s to 1/2 s	Analytics
Pan/Tilt/Zoom	Pan: 360° endless, 0.05°/s to 150°/s Tilt: -90° to +90°, 0.05°/s to 150°/s Zoom: 31x optical zoom, 12x digital zoom Preset accuracy: 0.10° 300 preset positions, tour recording, guard tour, control queue, orientation aid PTZ, focus recall	AXIS Object Analytics Object classes: humans, vehicles Features: line crossing, object in area, crossline counting ^{BETA} , time in area ^{BETA} Up to 10 scenarios Metadata visualized with color-coded bounding boxes Polygon include/exclude areas Perspective configuration ONVIF Motion Alarm event
System on chip (SoC)		Applications Included AXIS Object Analytics, AXIS Video Motion Detection, autotracking, gatekeeper Supported Support for AXIS Camera Application Platform enabling installation of third-party applications, see axis.com/acap
Model	ARTPEC-7	Cybersecurity
Memory	1024 MB RAM, 512 MB Flash	Edge security Software: Signed firmware, brute force delay protection, digest authentication, password protection, AES-XTS-Plain64 256bit SD card encryption Hardware: Axis Edge Vault cybersecurity platform TPM 2.0 (CC EAL4+, FIPS 140-2 Level 2), secure element (CC EAL 6+), Axis device ID, secure keystore, signed video, secure boot
Compute capabilities	Machine learning processing unit (MLPU)	Network security IEEE 802.1X (EAP-TLS) ^b , IEEE 802.1AR, HTTPS/HSTS ^b , TLS v1.2/v1.3 ^b , Network Time Security (NTS), X.509 Certificate PKI, IP address filtering
Video		Documentation <i>AXIS OS Hardening Guide</i> <i>Axis Vulnerability Management Policy</i> <i>Axis Security Development Model</i> AXIS OS Software Bill of Material (SBOM) To download documents, go to axis.com/support/cybersecurity/resources To read more about Axis cybersecurity support, go to axis.com/cybersecurity
Video compression	H.264 (MPEG-4 Part 10/AVC) Baseline, Main and High Profiles H.265 (MPEG-H Part 2/HEVC) Main Profile Motion JPEG	General
Resolution	1920x1080 HDTV 1080p to 320x180	Casing IP66-, IP68-, NEMA 4X- and IK10-rated aluminum casing Color: urban grey NCS S 5502-B Wiper included (silicone wiper blade)
Frame rate	Up to 60/50 fps (60/50 Hz) in all resolutions	Sustainability PVC free
Video streaming	Multiple, individually configurable streams in H.264, H.265, and Motion JPEG Axis Zipstream technology in H.264 and H.265 Controllable frame rate and bandwidth VBR/ABR/MBR H.264/H.265 Low latency mode	Power High PoE 90 W midspan 1-port: 100–240 V AC, max 1.35 A IEEE 802.3bt Type 4 Class 8 Camera consumption: typical 25 W, max 71 W
Image settings	Compression, color, brightness, sharpness, white balance, exposure control, exposure zones, image freeze on PTZ, scene profiles, rotation, electronic image stabilization (EIS) ^a , defogging, contrast, local contrast, autofocus, Forensic WDR: Up to 120 dB depending on scene, 32 individual polygon privacy masks including mosaic and chameleon privacy masks	Connectors RJ45 10BASE-T/100BASE-TX/1000BASE-T PoE
Audio		IR illumination Optimized IR with power-efficient, long-life 850 nm IR LEDs Range of reach 400 m (1300 ft) or more depending on the scene
Audio features	Network speaker pairing	Storage Support for SD/SDHC/SDXC card Support for SD card encryption (AES-XTS-Plain64 256bit) Recording to network-attached storage (NAS) For SD card and NAS recommendations, see axis.com
Audio output	Output via network speaker pairing	Operating conditions -50 °C to 55 °C (-58 °F to 131 °F) Maximum temperature according to NEMA TS 2 (2.2.7): 74 °C (165 °F) Arctic Temperature Control: Start-up as low as -40 °C (-40 °F) Humidity: 10–100% RH (condensing) Wind speed (sustained): 68 m/s (245 km/h, 150 mph) ^c
Network		Storage conditions -40 °C to 65 °C (-40 °F to 149 °F)
Security	IP address filtering, HTTPS ^b encryption, IEEE 802.1x (EAP-TLS) ^b network access control, user access log, centralized certificate management	
Network protocols	IPv4/v6, ICMPv4/ICMPv6, HTTP, HTTP/2, HTTPS ^b , TLS ^b , QoS Layer 3 DiffServ, FTP, SFTP, CIFS/SMB, SMTP, mDNS (Bonjour), UPnP [®] , SNMP v1/v2c/v3 (MIB-II), DNS/DNSv6, DDNS, NTP, NTS, RTSP, RTP, SRTP/RTSPS, TCP, UDP, IGMPv1/v2/v3, RTCP, ICMP, DHCPv4/v6, ARP, SOCKS, SSH, LLDP, NTCIP, CDP, MQTT v3.1.1, Secure syslog (RFC 3164/5424, UDP/TCP/TLS), Link-Local address (ZeroConf)	
System integration		
Application Programming Interface	Open API for software integration, including VAPIX [®] and AXIS Camera Application Platform, specifications at axis.com One-click cloud connection ONVIF [®] Profile G, ONVIF [®] Profile M, ONVIF [®] Profile S, and ONVIF [®] Profile T, specification at onvif.org	
Event conditions	Analytics, edge storage events, virtual inputs through API Detectors: day/night mode, live stream accessed, shock detection Hardware: fan, network, temperature Input Signal: virtual inputs, manual trigger MQTT subscribe PTZ: autotracking, error, moving, preset reached, ready Storage: disruption, recording	

Axis Q6225-LE PTZ Camera Specifications

System integration

Approvals	EMC EN 55032 Class A, EN 50121-4, EN 61000-3-2, EN 61000-3-3, EN 55035, EN 61000-6-1, EN 61000-6-2, FCC Part 15 Subpart B Class A, ICES-3(A)/NMB-3(B), VCCI Class A, RCM AS/NZS CISPR 32 Class A, KS C 9832 Class A, KS C 9835 Safety CAN/CSA C22.2 No. 62368-1, CAN/CSA-C22.2 No. 60950-22, IEC/EN/UL 62368-1, IEC/EN/UL 60950-22, IEC/EN 62471 risk group 2, IS 13252 Environment IEC/EN 60529 IP66/IP68, NEMA 250 Type 4X, NEMA TS 2 (2.2.7-2.2.9), IEC/EN 62262 IK10, MIL-STD-810G (Method 500.5, 501.5, 502.5, 503.5, 505.5, 506.5, 507.5, 509.5, 510.5, 521.3), IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-6, IEC 60068-2-14, IEC 60068-2-27, IEC 60068-2-78 Network NIST SP500-267 Midspan: EN 60950-1, GS, UL, cUL, CE, FCC, VCCI, CB
Weight	8.7 kg (19.3 lb)
Dimensions	210 x 330 x 313 mm (4 5/16 x 13 x 12 5/16 in) Effective Projected Area (EPA): 0.071 m ²

General

Included accessories	Installation Guide, Windows® decoder 1-user license, IK10 bumper, High PoE Midspan 1-port, RJ45 connector push pull plug
Optional accessories	AXIS T95A64 Corner Bracket AXIS T98A15-VE Media Converter Cabinet A For more accessories, see axis.com
Video management software	AXIS Companion, AXIS Camera Station, video management software from Axis' Application Development Partners available at axis.com/vms
Languages	English, German, French, Spanish, Italian, Russian, Simplified Chinese, Japanese, Korean, Portuguese, Traditional Chinese, Dutch, Czech, Swedish, Finnish, Turkish, Thai, Vietnamese
Warranty	5-year warranty, see axis.com/warranty

- a. EJS and privacy masks cannot be used simultaneously.
- b. This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit. (openssl.org), and cryptographic software written by Eric Young (ey@cryptsoft.com).
- c. The values shown are based on results from actual wind tunnel testing. The maximum wind speed when the unit is stationary is not known due to wind speed limit of 68 m/s (150 mph) at the test lab. For drag force calculations, use Effective Projected Area (EPA).